



Merlin Industrial Products Ltd

Kingsley Close, Lee Mill Industrial Estate

Ivybridge, Devon PL21 9LL

United Kingdom

Call: 0844 963 2197

Fax: 0844 963 2198

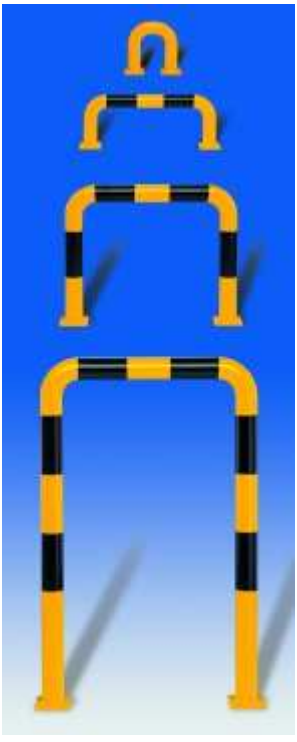
[WWW: www.merlin-industrial.co.uk](http://www.merlin-industrial.co.uk)


[Email : sales@205008.com](mailto:sales@205008.com)

Protect stock, traffic routes and work areas, separates different traffic routes (e.g. stacker lanes in warehouses and pedestrian traffic), machinery, supports, columns, shelving, loading ramps, equipment etc.

Widths: 375mm, 750mm and 1,000mm. Heights: 300mm, 600mm and 1,200mm.

TRAFFIC-LINE Protection Guards

Steel guards 76/3,0 mm, Surface Fixing TUV Approved		Dimensions heights/width mm	Treatment	Reference
	Yellow, with black stripes - surface fixing plate	350 / 1.000	Hot dip galvanized and powder coated	195.13.499
			Powder coated	195.14.589
		350 / 750	Hot dip galvanized and powder coated	195.16.265
			Powder coated	195.14.450
		350 / 375	Hot dip galvanized and powder coated	195.18.233
			Powder coated	195.15.621
	Yellow, with black stripes - surface fixing plate	600 / 1.000	Hot dip galvanized and powder coated	195.19.157
			Powder coated	195.18.943
		600 / 750	Hot dip galvanized and powder coated	195.17.623
			Powder coated	195.18.515
	Yellow, with black stripes - surface fixing plate	1.200 / 1.000	Hot dip galvanized and powder coated	195.18.822
			Powder coated	195.17.903
1.200 / 750		Hot dip galvanized and powder coated	195.17.296	
			Powder coated	195.19.573
Rawl plug bolt (8 required per guard)		12 /100		100.17.393
Throughbolt anchor (8 required per guard)		12 /100		100.24.665

Corner Protection hoops TUV Approved	Finish	Heights/Length (mm)	Treatment	Reference
	Yellow with black stripes - surface fixing plate	350 / 600 / 600	powder coated	195.13.241
			Hot dip galvanized and powder coated	195.14.708
		600 / 600 / 600	powder coated	195.14.637
			Hot dip galvanized and powder coated	195.17.083
		1.200 / 600 / 600	powder coated	195.17.512
			Hot dip galvanized and powder coated	195.13.874
Rawl plug bolt (12 required per guard)		12 /100		100.17.393
Throughbolt anchor (12 required per guard)		12 /100		100.24.665