


Steel Bunded Spill Flooring - SF30

Manufactured from steel plate, the unit is fully seam welded and fitted with removable galvanized steel grid mesh panels. When joining more than one section together you can use joining strip to cover the edge between the sections. Prior to painting the unit is fully shot blasted to provide a clean and keyed surface.

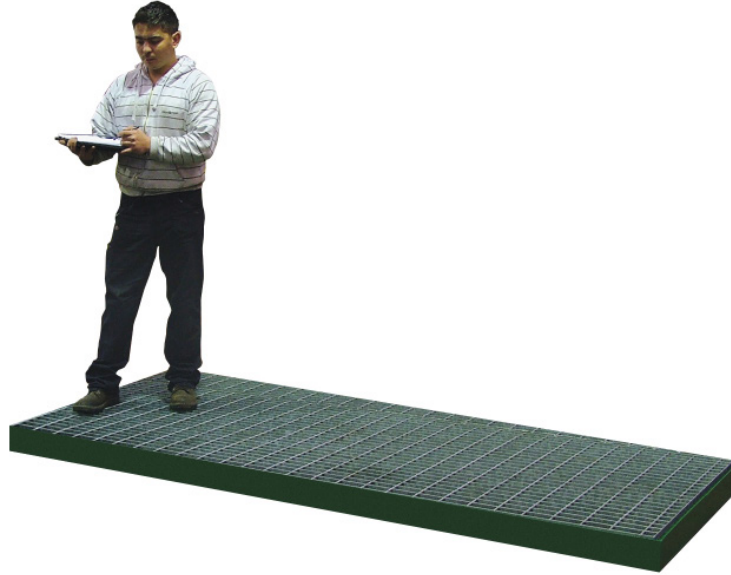

SPECIFICATION	
External size	2800mm L x 1300mm W x 110mm H
Sump capacity	360ltr
Colour	Green RAL 6029
Tare weight	170kg
Load capacity	2500kg
Paint specification	A high build, quick drying primer/topcoat paint specifically designed for use directly on to metal or bare steel, this paint contains zinc phosphate anti-corrosive pigments and is applied with a minimum dry film thickness of 75 microns.

Chargeable options:

- Ramp
- Joint cover joining strip

Please notify us at the time of ordering if you require either of these options.

This unit will be delivered by an HGV, possibly articulated therefore please ensure that a vehicle of this type can access your premises before ordering and advise us accordingly.

You will require an appropriate size/capacity forklift truck to offload this item from the delivery vehicle. Our standard delivery doesn't include any offloading.

