


STRUCTURAL PALLET RACKING

Completed by:	
Company:	
Email Address:	

Number of runs	
Number of bays per run	
Clear entry - left to right (mm) – max 3,900mm	
Capacity per level (kg) – max 3,000kgs beam load max 15,000kgs per frame	
Height (mm) – max 5,000mm	
Rack depth – max 1,100mm	
Number of beam levels	
Specific vertical clearance between beams? (mm) <i>Adjustment pitch is 100mm</i>	
Finish <i>Galvanised bracing fitted with all finishes</i>	<input type="checkbox"/> Painted <input type="checkbox"/> <i>Black (Standard)</i> <input type="checkbox"/> <i>Other (Please specify):</i> <input type="checkbox"/> Galvanised
Delivery Location	
E/O for installation	<input type="checkbox"/> Yes <input type="checkbox"/> No

Product Details:

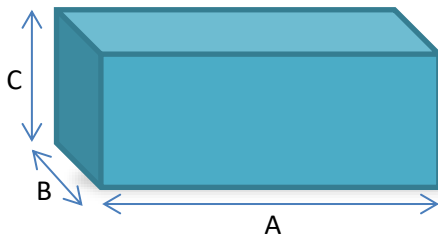

A:

B:

C:

Weight, each (kg):

Extras:

<input type="checkbox"/> Pallet Support Bars <input type="checkbox"/> Fork Entry Bars <input type="checkbox"/> Coil Cradles <input type="checkbox"/> Pallet Backstops	<input type="checkbox"/> Timber Decking <input type="checkbox"/> Steel Mesh Decking
--	--

Notes: