


BZKL - SPR SERIES

Fabricated Zinc Plated Steel
Single Ball Race Swivel Head

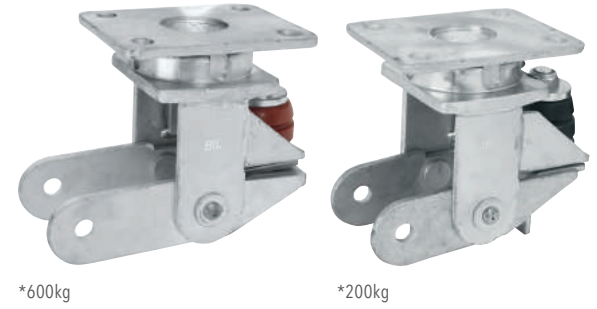


*600kg

*200kg




PLATE FIXING 200-600kg 150-200mm

Plate Fitting

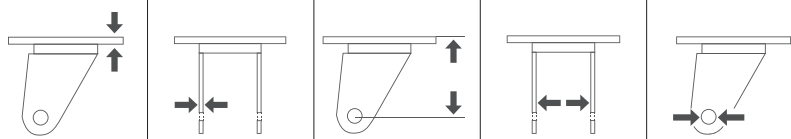

Dia (mm)	Swivel Code	Swivel Brake Code	Fixed Code	Plate Fitting	Steel Gauge Plate (mm)	Steel Gauge Fork (mm)	Height To Axle Hole (mm)	Fork Width (mm)	Axle Bolt (mm)	Load Capacity (kg)
150	BZKL150ASSPR200	-	BZKFL150ASSPR200	A	7.5	6	*128	65	12	200
150	BZKL150ASSPR	-	BZKFL150ASSPR	A	7.5	6	*128	65	12	600
200	BZKL200ASSPR200	-	BZKFL200ASSPR200	A	7.5	6	*157	65	12	200
200	BZKL200ASSPR	-	BZKFL200ASSPR	A	7.5	6	*157	65	12	600

*Height reduced by 20mm when compressed

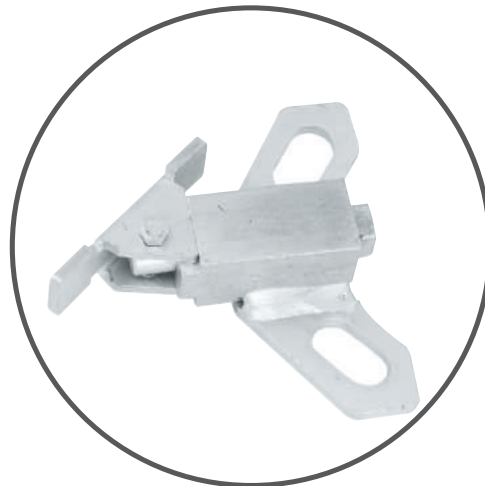

Directional Lock Available Add DL To Code
- Not Suitable For BZKL-SPR Series

- Heavy duty castors with built-in suspension
- Unique elastomeric spring system reduces bounce under light loading
- Substantial noise reduction
- Reduction of wear and tear to floor surfaces
- Increase in wheel and equipment longevity
- Shock absorption protects the load
- Improved handling of equipment especially when cornering
- Ideal for use in aerospace, glass and motor industries



BZKL-SPR SERIES

Fabricated Zinc Plated Steel
Single Ball Race Swivel Head

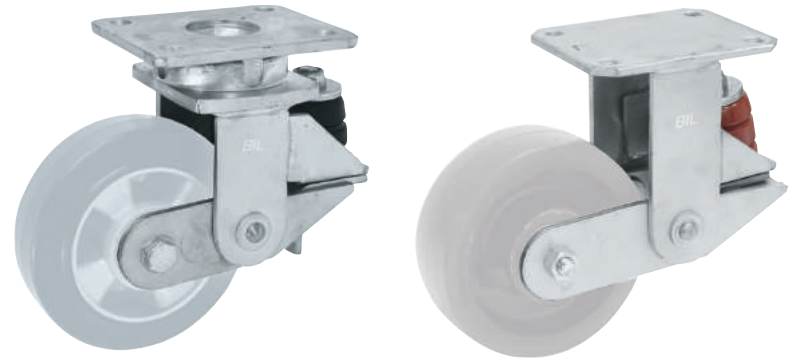


PLATE FIXING 200-600kg 150-200mm

Top Plate Fixing

Dia (mm)	Height Without Load (mm)	Height With Full Load (mm)	Plate (mm)	Centres (mm)	Fixing Bolt (mm)	Type	Bearing	Spring Rating	65 Shore A Black High Quality Elastic Rubber On Aluminium P 272 -30°C to +80°C			55 Shore A Black High Quality Elastic Rubber On Aluminium P 273 -30°C to +80°C			75 Shore A Blue Polyurethane On Aluminium P 283 -20°C to +80°C			94 Shore A Brown Polyurethane On Cast Iron P 286 -20°C to +80°C						
									Code	Load (kg)	Tread (mm)	Radius (mm)	Code	Load (kg)	Tread (mm)	Radius (mm)	Code	Load (kg)	Tread (mm)	Radius (mm)	Code	Load (kg)	Tread (mm)	Radius (mm)
150	203	183	138 x 110	105 x 80/75	10	☺	☺	200kg	BZKL150ERBJSPR200	200	50	165	BZKL150SRERBJSPR200	200	50	165	BZKL150SPABJSPR200	200	50	165	BZKL150PTBJSPR200	200	50	165
								600kg	BZKL150ERBJSPR	350	50	BZKL150SRERBJSPR	270	50	BZKL150SPABJSPR	500	50	BZKL150PTBJSPR	600	50				
								200kg	BZKFL150ERBJSPR200	200	50	BZKFL150SRERBJSPR200	200	50	BZKFL150SPABJSPR200	200	50	BZKFL150PTBJSPR200	200	50				
								600kg	BZKFL150ERBJSPR	350	50	BZKFL150SRERBJSPR	270	50	BZKFL150SPABJSPR	500	50	BZKFL150PTBJSPR	600	50				
200	257	237	138 x 110	105 x 80/75	10	☺	☺	200kg	BZKL200ERBJSPR200	200	50	182	BZKL200SRERBJSPR200	200	50	182	BZKL200SPABJSPR200	200	50	182	BZKL200PTBJSPR200	200	50	182
								600kg	BZKL200ERBJSPR	500	50	BZKL200SRERBJSPR	380	50	BZKL200SPABJSPR	500	50	BZKL200PTBJSPR	600	50				
								200kg	BZKFL200ERBJSPR200	200	50	BZKFL200SRERBJSPR200	200	50	BZKFL200SPABJSPR200	200	50	BZKFL200PTBJSPR200	200	50				
								600kg	BZKFL200ERBJSPR	500	50	BZKFL200SRERBJSPR	380	50	BZKFL200SPABJSPR	500	50	BZKFL200PTBJSPR	600	50				

- Heavy duty castors with built-in suspension
- Unique elastomeric spring system reduces bounce under light loading
- Substantial noise reduction
- Reduction of wear and tear to floor surfaces
- Increase in wheel and equipment longevity
- Shock absorption protects the load
- Improved handling of equipment especially when cornering
- Ideal for use in the aerospace, glass and motor industries